

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 June 2002 (27.06.2002)

PCT

(10) International Publication Number
WO 02/50347 A1

(51) International Patent Classification⁷: D01F 1/10, 6/46,
6/04, 6/06, D04H 1/56, 3/00, B32B 5/26

(21) International Application Number: PCT/US01/49904

(22) International Filing Date:
21 December 2001 (21.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/257,229 21 December 2000 (21.12.2000) US
Not furnished 19 December 2001 (19.12.2001) US

(71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 North Lake Street, Neenah, WI 54956 (US).

(72) Inventors: **POWERS, Michael, D.**; 4395 Hickory Point Drive, Canton, GA 30115 (US). **FITTING, Steven, W.**; 101 Summer Place, Acworth, GA 30102 (US).

(74) Agent: **DORITY & MANNING, P.A.**; P.O. Box 1449, One Liberty Square, 55 Beattie Place, Suite 1600, Greenville, SC 29602 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]


(54) Title: WATER REPELLANT MELTBLOWN WEBS AND LAMINATES

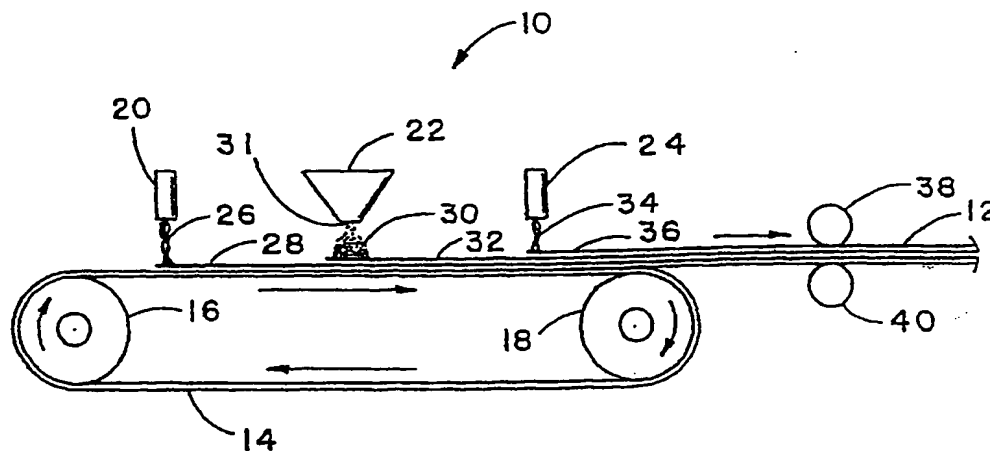

(57) Abstract: Nonwoven webs with good barrier properties are disclosed. The nonwoven webs can be, for instance, meltspun webs such as meltblown webs and spunbonded webs. In accordance with the present invention, a hydrophobic agent is incorporated into the polymer that is used to produce the web for improving the barrier properties of the web. Hydrophobic agents that may be used in accordance with the present invention include polydimethyl siloxanes and guerbet esters.

WO 02/50347 A1

WO 02/50347 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WATER REPELLANT MELTBLOWN WEBS AND LAMINATES**Related Applications**

The present application is based on a Provisional Application having U.S. Serial No. 60/257,229, filed on December 21, 2000.

Background of the Invention

Non-woven fabric laminates are useful for a wide variety of applications. Such non-woven fabric laminates are useful for wipers, towels, industrial garments, medical garments, medical drapes and the like. In heavier basis weights, the laminates are used in recreational applications such as tents and as car covers.

Disposable fabric laminates have achieved especially widespread use in hospital operating rooms for drapes, gowns, towels, foot covers, sterilization wraps, and the like. Such medical fabric laminates are generally spunbond/meltblown/spunbond (SMS) laminates including non-woven outer layers of spunbond polymers and an interior barrier layer of meltblown polymers. Examples of SMS laminates are described in U.S. Patent No. 4,041,203 to Brock, et al., U.S. Patent No. 4,766,029 to Brock, et al., U.S. Patent No. 5,169,706 to Collier IV, et al., U.S. Patent No. 5,188,885 to Timmons, et al., U.S. Patent No. 5,464,688 to Timmons, et al., and U.S. Patent No. 5,607,798 to Kobylyvker, et al. which are all incorporated herein by reference.

Some fabric laminates, including the SMS fabric laminates, are substantially water impermeable, yet breathable allowing for water vapor transmission. For example, in an SMS laminate, the internal meltblown barrier layer is porous but still can inhibit the strikethrough of fluids or the penetration of bacteria from the outside of the fabric laminate to the inside. In order for the laminate to perform properly, it is necessary for the meltblown barrier layer to have a fiber size and a pore size distribution that assure breathability of the fabric while at the same time inhibiting strikethrough of fluids and bacteria.

5 In the past, those skilled in the art have attempted to design
meltspun non-woven webs, such as meltblown webs, that have
improved liquid repellency. For instance, in the past, fluoropolymers
have been added to the polymer during formation of the web in order
to improve the liquid barrier properties of the web. Such additives are
disclosed in U.S. Patent No. 5,178,932 to Perkins, et al and in U.S.
Patent No. 5,178,931 also to Perkins, et al which are both
incorporated herein by reference. A need still remains, however, for
methods and processes for improving the liquid repellency of
10 meltspun webs. A need also exists for laminates containing the
meltspun webs that inhibit the strikethrough of fluids.

Summary of The Invention

15 In general, the present invention is directed to nonwoven webs
made from thermoplastic polymers that have improved barrier
properties, such as liquid repellency properties. The nonwoven web
can be, for instance, a meltspun web such as a meltblown web or a
spunbond web. In accordance with the present invention, in order to
improve the barrier properties of the web, a hydrophobic agent is
incorporated into the polymer that is used to produce the web. The
20 hydrophobic agent can be, for instance, a polydimethylsiloxane, a
guerbet ester, or mixtures thereof. The hydrophobic agent can be
incorporated into the polymer in an amount less than about 10% by
weight. For example, in one embodiment, the hydrophobic agent can
be incorporated into the polymer in an amount from about 0.5% to
25 about 3% by weight, and particularly in an amount of about 2% by
weight.

30 Webs made according to the present invention exhibit
improved liquid repellency properties as evidenced by hydrostatic
head values, and improved blood strikethrough properties as
exhibited by resistance to blood penetration values. The nonwoven
webs can be used alone or can be combined into a laminate.

For example, in one embodiment of the present invention, a hydrophobic agent is combined with a polymer and formed into a meltblown web. The meltblown web is then used to form a spunbond/meltblown/spunbond laminate.

5 Laminates made according to the present invention can be used in many and diverse applications. For instance, the laminates can be used to form medical garments, drapes, gowns, towels, foot covers, sterilization wraps, and the like. Laminates made in accordance with the present invention can also be used to form
10 various personal care articles, such as diapers, incontinence products, and feminine hygiene products.

Other objects, features, and aspects of the present invention are discussed in greater detail below.

Definitions

15 As used herein the term "meltblown fibers" means fibers of a polymeric material which are generally formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity, usually hot, gas (e.g. air) streams which attenuate the
20 filaments of molten thermoplastic material to reduce their diameter. Thereafter, the meltblown fibers can be carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Such a process is disclosed, for example, in U.S. Patent No. 3,849,241 to Butin, et al. which is
25 incorporated herein by reference. Meltblown fibers may be continuous or discontinuous, are generally smaller than 10 microns in average diameter, and are generally tacky when deposited onto a collecting surface.

30 As used herein, the term "neck-bonded laminate" refers to an elastic member being bonded to a non-elastic member while the non-elastic member is extended in the machine direction creating a

necked material. "Neck-bonded laminate" refers to a composite material having at least two layers in which one layer is a necked, non-elastic layer and the other layer is an elastic layer thereby creating a material that is elastic in the cross direction. Examples of neck-bonded laminates are such as those described in U.S. Patent Nos. 5,226,992, 4,981,747, 4,965,122, and 5,336,545, all to Morman, all of which are incorporated herein by reference thereto.

As used herein the term "spunbond fibers" refers to small diameter fibers of a molecularly oriented polymeric material. Spunbond fibers may be formed by extruding a molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced as by, for example, in U.S. Patent No. 4,340,563 to Appel, et al., U.S. Patent No. 3,692,618 to Dorschner, et al., U.S. Patent No. 3,802,817 to Matsuki, et al., U.S. Patent Nos. 3,338,992 and 3,341,894 to Kinney, U.S. Patent No. 3,502,763 to Hartman, U.S. Patent No. 3,542,615 to Dobo, et al., and U.S. Patent No. 5,382,400 to Pike, et al., which are all incorporated herein by reference. Spunbond fibers are generally not tacky when they are deposited onto a collecting surface and are generally continuous. Spunbond fibers are often about 10 microns or greater in diameter. However, fine fiber spunbond webs (having an average fiber diameter less than about 10 microns) may be achieved by various methods. The spunbond fibers can be monocomponent or multi-component fibers.

As used herein, the term "stretch-bonded laminate" refers to a composite material having at least two layers in which one layer is a non-elastic gatherable layer and the other layer is an elastic layer. The layers are joined together when the elastic layer is in an extended condition so that upon relaxing the layers, the gatherable layer is gathered. For example, one elastic member can be bonded to another member while the elastic member is extended at least about

25 percent of its relaxed length. Such a multilayer composite elastic material may be stretched until the non-elastic layer is fully extended. One type of stretch-bonded laminate is disclosed, for example, in U.S. Patent No. 4,720,415 to Vander Wielen, et al., which is incorporated herein by reference. Other composite elastic materials are described and disclosed in U.S. Patent Nos. 4,789,699 to Keiffer, et al., 4,781,966 to Taylor, 4,657,802 to Morman, and 4,655,760 to Morman, et al., all of which are incorporated herein by reference thereto.

Brief Description of the Drawings

A full and enabling disclosure of the present invention, including the best mode thereof to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures in which:

Figure 1 is a schematic diagram of a process line for making laminates of the present invention; and

Figure 2 is a cross-sectional view of one embodiment of a laminate made in accordance with the present invention.

Repeated use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the present invention.

Detailed Description of Preferred Embodiments

Reference now will be made in detail to the embodiments of the invention, one or more examples of which are set forth below. Each example is provided by way of explanation of the invention, not limitation of the invention. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope or spirit of the invention. For instance, features illustrated or described as part of one embodiment, can be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention


cover such modifications and variations as come within the scope of the appended claims and their equivalents.

5 In general, the present invention is directed to non-woven webs, particularly meltspun webs having improved barrier properties, such as water repellency properties. Specifically, in accordance with the present invention, a hydrophobic agent is combined with a polymer prior to or during formation of the non-woven web. For instance, the hydrophobic agent can be added to the polymer in a molten state as the polymer is being extruded into fibers or filaments, 10 or can be precompounded with the polymer in pellet form prior to being added to an extruder. Once included in the polymer, the hydrophobic agent causes the resulting non-woven web to have a greater resistance to wetting and to the passage of fluids therethrough.

15 Examples of hydrophobic additives that maybe used in accordance with the present invention include siloxanes, such as polydimethylsiloxanes and guerbet esters. Examples of commercially available polydimethylsiloxanes that may be used in the present invention include LAMBENT 89, LAMBENT 88, and LAMBENT 84 20 which are all available from Lambent Technologies of Norcross, Georgia.

25 In general guerbet esters are branched alcohols substituted in the 2-position with an alkyl group. Examples of guerbet esters include, by way of illustration only, 2-butyloctanol, 2-pentylnonenol, 2-hexyldecanol, 2-nonyltridecanol, 2-decyltetradecanol, and the like. Particular examples of commercially available guerbet esters that may be used in the present invention include LAMBENT CE-2000 and LAMBENT JJF-77-33C, also available from Lambent Technologies. 30 LAMBENT CE-2000 has the following chemical structure:

7

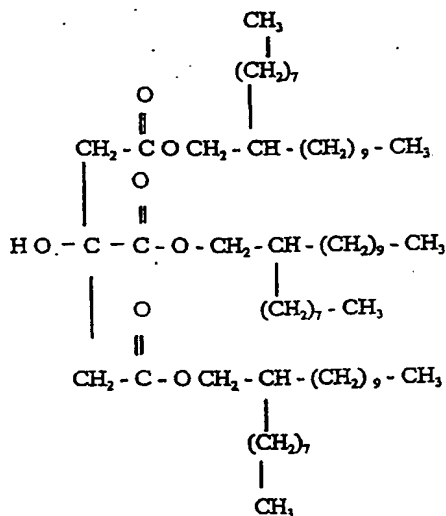

LAMBENT CE-2000 is provided as a 100% active chemical of trioctyldodecylcitrate.

The amount of the hydrophobic agent that is incorporated into a polymer in forming nonwoven webs made in accordance with the present invention can vary depending upon the particular application and the desired result. For most applications, the hydrophobic agent is present in the polymer in an amount less than 10% by weight. More particularly, the hydrophobic agent is present in the polymer in an amount less than about 5% by weight, and particularly in an amount from about 0.5% to about 3% by weight.

In general, the hydrophobic agent can be combined with any suitable thermoplastic polymer that can be used to form nonwoven webs. Examples of thermoplastic polymers include polyolefins, polyesters, polyetheresters, and polyamides. For instance, in one embodiment, the hydrophobic additive can be combined with a polyolefin, such as polyethylene, polypropylene, and copolymers thereof.

Various different types of nonwoven webs can be formed from the thermoplastic polymers once containing the hydrophobic agent of

the present invention. For example, the nonwoven web formed according to the present invention can be a meltblown web made from meltblown fibers or a spunbond web made from spunbond fibers. Nonwoven webs made in accordance with the present invention have been found to exhibit good liquid repellency properties. For instance, the webs exhibit good hydrostatic head values and good blood strikethrough properties, such as by having favorable resistance to blood penetration values.

Beside containing one or more hydrophobic agents of the present invention, the polymer used to form the nonwoven web can also contain various other additives. For example, various stabilizers can be added to the polymer, such as light stabilizers, heat stabilizers, processing aides, and additives that increase the thermal aging stability of the polymer. Further, auxiliary wetting agents, such as hexanol, antistatic agents such as a potassium alkyl phosphate, and alcohol repellants such as various fluoropolymers (e.g., DuPont Repellent 9356H) may also be present.

Once the non-woven web is formed, the web can be used alone as desired or incorporated into a laminate. For example, in one embodiment of the present invention, the non-woven web made in accordance with the present invention is a meltblown web that is incorporated into a spunbond/meltblown/spunbond (SMS) laminate.

For exemplary purposes, one embodiment of a system for forming an SMS laminate is illustrated in Figure 1. As shown, the system includes a forming machine generally 10 which can be used to produce an SMS fabric laminate 12 having a meltblown barrier layer 32 in accordance with the present invention. Particularly, the forming machine 10 includes an endless foraminous forming belt 14 wrapped around rollers 16 and 18 so that the belt 14 is driven in the direction shown by the arrows. The forming machine 10 has three stations, spunbond station 20, meltblown station 22, and spunbond station 24.

It should be understood, however, that more than three forming stations may be utilized to build up layers of higher basis weight. Alternatively, each of the laminate layers may be formed separately, rolled, and later converted into the SMS fabric laminate off-line. In addition, the fabric laminate 12 could be formed of more than or less than three layers depending upon the requirements for the particular end use of the fabric laminate 12. For example, for recreational fabric and card cover applications, the laminate can include two inner meltblown layers.

The spunbond stations 20 and 24 are conventional extruders with spinnerets which form continuous filaments of a polymer and deposit those filaments onto the forming belt 14 in a random interlaced fashion. The spunbond stations 20 and 24 may include one or more spinneret heads depending upon the speed and process and the particular polymer being used. The nonwoven spunbond webs 28 and 36 are prepared in conventional fashion such as described in U.S. Patent No. 3,692,618; U.S. Patent No. 3,338,992; U.S. Patent No. 3,341,394; U.S. Patent No. 3,502,538; U.S. Patent No. 3,502,763; U.S. Patent No. 3,909,009; U.S. Patent No. 3,542,615; U.S. Patent No. 4,340,563; and U.S. Patent No. 5,382,400. Other methods for forming a nonwoven web having continuous filaments of a polymer are contemplated for use with the present invention.

Spunbond materials prepared with continuous filaments generally have at least three common features. First, the polymers are continuously extruded through a spinneret to form discrete filaments. Thereafter, the filaments are drawn either mechanically or pneumatically without breaking in order to molecularly orient the polymer filaments and achieve tenacity. Lastly, the continuous filaments are deposited in a substantially random manner onto a carrier belt to form a web. Particularly, the spunbond station 20 produces spunbond filaments 26 from a fiber forming polymer. The

filaments are randomly laid on the belt 14 to form a spunbond external layer 28.

5 The meltblown station 22 includes a die 31 which is used to form microfibers 30. The throughput of the die 31 is specified in pounds of polymer melt per inch of die width per hour (PIH). As a thermoplastic polymer exits the die 31, high pressure fluid usually air, attenuates and spreads the polymer stream to form microfibers 30. The microfibers 30 are randomly deposited on the top of the spunbond layer 28 and form a meltblown layer 32. In one
10 embodiment of the present invention, a hydrophobic agent is combined with the thermoplastic polymer that is used to form meltblown layer 32.

15 The meltblown station 22 produces fine fibers 30 from a fiber forming polymer. The fibers 30 are randomly deposited on top of spunbond layer 28 to form a meltblown internal layer 32. For an SMS medical fabric laminate, for example, the meltblown barrier layer 32 has a basis weight of from about 0.2 osy (ounces per square yard) to about 0.8 osy, and particularly from about 0.6 osy to about 0.5 osy.

20 After the internal layer 32 has been deposited by the meltblown station 22 onto layer 28, spunbond station 24 produces spunbond filaments 34 which are deposited in random orientation on top of the meltblown layer 32 to produce external spunbond layer 36. For an SMS medical fabric laminate, for example, the layers 28 and 36 each have a basis weight of from about 0.2 osy to about 2.0 osy, and
25 particularly from about 0.3 osy to about 1.2 osy.

30 The resulting SMS fabric laminate web 12 as shown in Figure 2 is then fed through bonding rolls 38 and 40. The surfaces of the bonding rolls 38 and 40 are provided with a raised pattern such as spots or grids. The bonding rolls are heated to the softening temperature of the polymer used to form the layers of the web 12. As the web 12 passes between the heated bonding rolls 38 and 40, the

material is compressed and heated by the bonding rolls in accordance with the pattern on the rolls to create a pattern of discrete areas, such as 41 shown in Figure 2, which areas are bonded from layer to layer and are bonded with respect to the particular filaments and/or fibers within each layer. Such discrete area or spot bonding is well known in the art and can be carried out as described by means of heated rolls or by means of ultrasonic heating of the web 12 to produce discrete area thermally bonded filaments, fibers, and layers. In one embodiment, the fibers of the meltblown layer of the fabric laminate are fused within the bond areas while the filaments of the spunbond layers retain their integrity in order to achieve good strength characteristics.

Besides being used to form SMS laminates as described above, it is believed that nonwoven webs made in accordance with the present invention can also be used to form various other laminates. For example, meltblown webs made in accordance with the present invention can also be used to form neckbonded laminates and stretchbonded laminates. It should also be understood that the hydrophobic additives of the present invention can be incorporated into a single layer or into every layer of the laminate.

Example

The following example was performed in order to compare meltspun webs incorporating a hydrophobic agent of the present invention with webs not containing the hydrophobic agent.

Meltblown nonwoven webs were prepared. All webs had a basis weight of about 1.5 ounces per square yard. All of the fabrics were topically treated with a hexanol auxiliary wetting agent. The hexanol was applied to the web in an aqueous solution containing 0.3% by weight hexanol. After being applied to the web, substantially all of the hexanol evaporated upon drying. Some of the fabrics were additionally treated with a topical fluoropolymer for alcohol repellency

(DuPont® Repellent 9356H), and a potassium alkyl phosphate antistatic additive (Quadrastat PIBK). The fluoropolymer and the antistatic additive were added to the web at an add-on level of about 0.36% by weight for the fluoropolymer and at about 0.22% by weight for the antistatic additive.

In addition, the nonwoven webs contained the hydrophobic additives of the present invention. The hydrophobic additives were compounded into polypropylene pellets containing 10% by weight of the hydrophobic additive. The compounded pellets were combined with other polypropylene pellets such that the hydrophobic additive was added at a 2% by weight total add-on level. The combined pellets were fed to a meltblown die for forming the meltblown webs.

Two types of hydrophobic additives were investigated, polydimethylsiloxanes and guerbet esters, all produced by Lambent Technologies of Norcross, Georgia. The polydimethylsiloxanes investigated included Lambent 89 (L89), Lambent 88 (L88), and Lambent 84 (L84). The guerbet esters investigated included Lambent CE-2000 and Lambent JJF-77-33C.

The testing procedures are described as follows:

Hydrohead: A measure of the liquid barrier properties of a fabric is the hydrohead test. The hydrohead test determines the height of water (in centimeters) which the fabric will support before a predetermined amount of liquid passes through. A fabric with a higher hydrohead reading indicates it has a greater barrier to liquid penetration than a fabric with a lower hydrohead. The hydrohead test is performed according to Federal Test Standard 191A, Method 5514. Results are reported in centimeters with standard deviations.

Resistance to Blood Penetration (RBP): The blood strikethrough or resistance to blood penetration of a fabric is a measure of the amount of blood which penetrates the fabric at a particular pressure. The blood strikethrough is performed by weighing

a blotter placed next to the fabric before and after the test which consists of applying 1 pound per square inch gauge (psig) pressure to the side of the fabric away from the blotter, which side has blood thereon. The pressure is ramped up over approximately 10 seconds and removed when it reaches 1 psig. The difference in the weight of the blotter before and after the test in grams represents the amount of blood which has penetrated the fabric. Results are reported as a percentage of the change of weight of the blotter.

Charge Acceptance/Static Decay: This test determines the electrostatic properties of a material by measuring the time required for dissipating a charge from the surface of the material. Except as specifically noted, this test is performed in accord with INDA Standard Test Methods: IST 40.2 (95). Generally described, a 3.5 inch by 6.5 inch specimen is conditioned in a 50% RH environment, including removal of any existing charge. The specimen is then placed in electrostatic decay testing equipment and charged to a predetermined voltage. Once the specimen has accepted the charge (reported as charge acceptance), the charging voltage is removed and the electrodes grounded. The time was recorded for the sample to have a 50% decay. The test was then repeated to measure a 90% decay. The time was recorded.

Table 1 displays the testing results for meltblown fabrics without an added topical fluoropolymer and antistatic additive.

Table 1

Sample #	Hydrophobic additive	Hydrohead (cm)	RBP (%)	Charge Acceptance Kv	50% Static decay (sec)	90% Static decay (sec)
1	None	52.1	1.88	5	0.86	0.96
2	L89	71.8	1.89	.750	0.02	0.13
3	L88	67.1	1.49	.416	0.02	0.01
4	L84	54.9	2.01	.250	0.02	0.015
5	CE-2000	73.6	1.56	5K	0.16	0.17
6	JJF-77-33	68.6	1.91	5K	0.16	0.15

Table 2 displays the testing results for meltblown fabrics which include an added topical fluoropolymer and antistatic additive.

Table 2

Sample #	Hydrophobic additive	Hydrohead	RBP	Charge Acceptance Kv	50% Static Decay (sec)	90% Static Decay (sec)
7	None	55.5	1.61	5	0.33	0.27
8	JJF-77-33	77.8	1.76	5	0.09	0.10
9	CE-2000	74.6	1.33	5	0.03	0.02
10	L84	73.2	1.16	.250	0.01	0.02
11	L88	67.5	1.08	.166	0.01	0.02
12	L89	74.2	1.68	1.3	>60	0.03

As shown above, meltblown webs treated in accordance with the present invention generally have improved liquid repellency properties.

These and other modifications and variations to the present invention may be practiced by those of ordinary skill in the art, without departing from the spirit and scope of the present invention, which is more particularly set forth in the appended claims. In addition, it should be understood that aspects of the various embodiments may be interchanged both in whole or in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention so further described in such appended claims.

WHAT IS CLAIMED:

1. A meltspun web having improved liquid repellency properties, the meltspun web comprising a thermoplastic polymer and a hydrophobic agent, the hydrophobic agent being incorporated into the thermoplastic polymer, the hydrophobic agent comprising a polydimethylsiloxane, a guerbet ester, or mixtures thereof.

2. A meltspun web as defined in claim 1, wherein the hydrophobic agent comprises a polydimethylsiloxane.

3. A meltspun web as defined in claim 1, wherein the hydrophobic agent comprises a guerbet ester.

4. A meltspun web as defined in claim 3, wherein the guerbet ester comprises trioctyldodecylcitrate.

5. A meltspun web as defined in claim 1, wherein the thermoplastic polymer is a polyolefin, a polyester, a polyetherester, or a polyamide.

6. A meltspun web as defined in claim 1, wherein the thermoplastic polymer is polypropylene or polyethylene.

7. A meltspun web as defined in claim 1, wherein the web is a meltblown web.

8. A meltspun web as defined in claim 1, wherein the web is a spunbond web.

9. A meltspun web as defined in claim 1, wherein the meltspun web further comprises a fluoropolymer topically applied to the web.

10. A meltspun web as defined in claim 1, wherein the web has a basis weight of up to about 2 osy.

11. A meltspun web as defined in claim 1, wherein the web has a hydrohead of at least 60 cm.

12. A meltspun web as defined in claim 1, wherein the web has a resistance to blood penetration of less than about 1.7%.

13. A meltspun web as defined in claim 1, wherein the hydrophobic agent is incorporated into the thermoplastic polymer in an amount up to about 10% by weight.

14. A meltspun web as defined in claim 1, wherein the hydrophobic agent is incorporated into the thermoplastic polymer in an amount from about 0.5% to about 5% by weight.

15. An absorbent product incorporating the meltspun web defined in claim 1.

16. A laminate comprising at least a first layer bonded to a second layer, the first layer comprising a meltspun web having improved liquid repellency properties, the meltspun web comprising a thermoplastic polymer and a hydrophobic agent, the hydrophobic agent being incorporated into the thermoplastic polymer, the hydrophobic agent comprising a polydimethylsiloxane, a guerbet ester, or mixtures thereof.

17. A laminate as defined in claim 16, wherein the hydrophobic agent comprises a polydimethylsiloxane.

18. A laminate as defined in claim 16, wherein the hydrophobic agent comprises a guerbet ester.

19. A laminate as defined in claim 18, wherein the guerbet ester comprises trioctyldodecylcitrate.

20. A laminate as defined in claim 16, wherein the thermoplastic polymer is a polyolefin, a polyester, a polyetherester, or a polyamide.

21. A laminate as defined in claim 16, wherein the thermoplastic polymer is polypropylene or polyethylene.

22. A laminate as defined in claim 16, wherein the meltspun web is a meltblown web.

23. A laminate as defined in claim 22, wherein the second layer comprises an outer spunbond layer and wherein the laminate includes a third layer comprising an outer spunbond

layer, the meltblown layer being positioned in between the two outer spunbond layers.

24. A laminate as defined in claim 16, wherein the meltspun web is a spunbond web.

5 25. A laminate as defined in claim 16, wherein the meltspun web further comprises a fluoropolymer, topically applied to the web.

26. A laminate as defined in claim 16, wherein the meltspun web has a basis weight of up to about 2 osy.

10 27. A laminate as defined in claim 16, wherein the meltspun web has a hydrohead of at least 60 cm.

28. A laminate as defined in claim 16, wherein the meltspun web has a resistance to blood penetration of less than about 1.7%.

15 29. A laminate as defined in claim 16, wherein the hydrophobic agent is incorporated into the thermoplastic polymer in an amount up to about 10% by weight.

30. A laminate as defined in claim 16, wherein the hydrophobic agent is incorporated into the thermoplastic polymer in an amount from about 0.5% to about 5% by weight.

20 31. A laminate as defined in claim 16, wherein the layers are thermally bonded together.

32. A medical garment incorporating the laminate defined in claim 16.

25 33. A shoe covering incorporating the laminate defined in claim 16.

34. A personal care article incorporating the laminate defined in claim 16.

30 35. A drape incorporating the laminate defined in claim 16.

36. A laminate comprising a first layer bonded to a

second layer, the first layer comprising a meltblown web made from a thermoplastic polymer, the thermoplastic polymer comprising polyethylene or polypropylene, the thermoplastic polymer incorporating a hydrophobic agent, the hydrophobic agent comprising a polydimethylsiloxane, a guerbet ester, or mixtures thereof, the hydrophobic agent being present in the thermoplastic polymer in an amount from about 0.5% to about 5% by weight, the meltblown web having a basis weight of up to about 2 osy.

37. A laminate as defined in claim 36, wherein the second layer comprises a spunbond web.

38. A laminate as defined in claim 37, wherein the laminate further comprises a third layer comprising a spunbond web, the meltblown web being located between the two spunbond webs.

39. A laminate as defined in claim 38, wherein the layers are thermally bonded together.

40. A laminate as defined in claim 36, wherein the hydrophobic agent comprises a polydimethylsiloxane.

41. A laminate as defined in claim 36, wherein the hydrophobic agent comprises a guerbet ester.

42. A laminate as defined in claim 41, wherein the guerbet ester comprises trioctyldodecylcitrate.

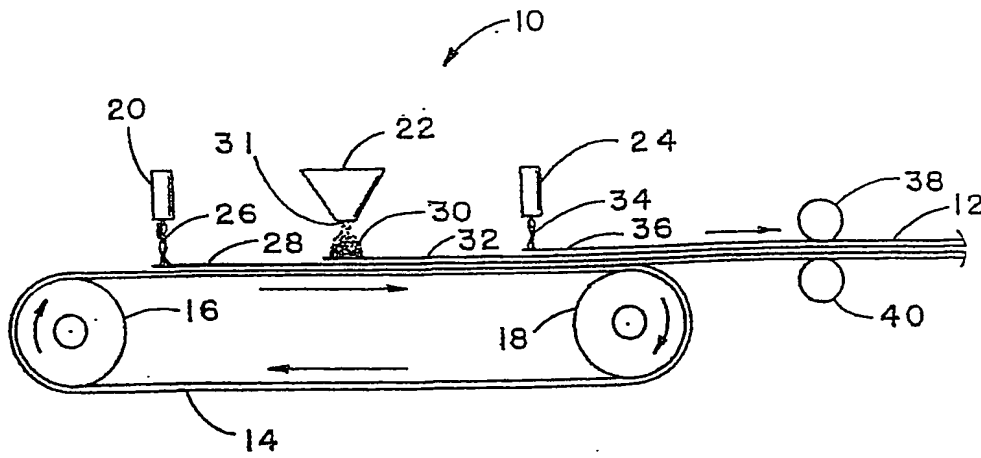


Fig. 1

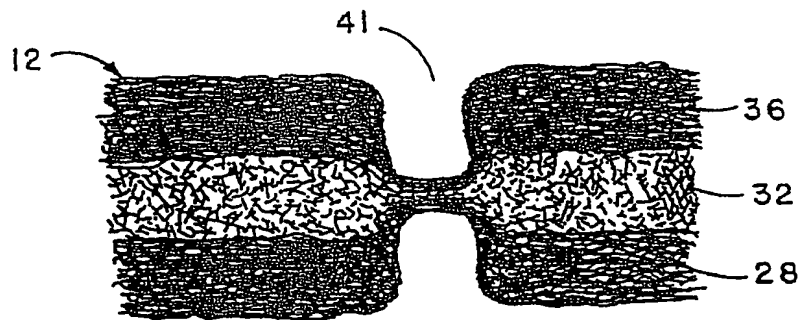


Fig. 2

INTERNATIONAL SEARCH REPORT

In national Application No
PCT/US 01/49904

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D01F1/10 D01F6/46 D01F6/04 D01F6/06 D04H1/56
D04H3/00 B32B5/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 D01F D04H B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 761 846 A (HERCULES INC) 12 March 1997 (1997-03-12) the whole document	1,2,5-8, 10-15 16,17, 20-24, 26-40
Y	WO 95 15848 A (FIBERWEB NORTH AMERICA INC ; LICKFIELD DEBORAH K (US); BERMAN MARK) 15 June 1995 (1995-06-15) the whole document	16,17, 20-23, 26-40
Y	WO 93 25746 A (FIBERWEB NORTH AMERICA INC) 23 December 1993 (1993-12-23) claims 1,8	24

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "8" document member of the same patent family

Date of the actual completion of the international search

24 Apr11 2002

Date of mailing of the international search report

06/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Tarrida Torrell, J

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 01/49904

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0761846	A	12-03-1997	EP 0761846 A2 JP 9170112 A US 5763334 A	12-03-1997 30-06-1997 09-06-1998
WO 9515848	A	15-06-1995	US 5484645 A AT 164548 T AU 1265595 A DE 69409400 D1 DE 69409400 T2 DK 732992 T3 EP 0732992 A1 IL 111910 A JP 9506305 T WO 9515848 A1	16-01-1996 15-04-1998 27-06-1995 07-05-1998 29-10-1998 01-02-1999 25-09-1996 16-08-1998 24-06-1997 15-06-1995
WO 9325746	A	23-12-1993	US 5415925 A AT 145681 T AU 669197 B2 AU 4598793 A BR 9306527 A CA 2137132 A1 CN 1086276 A DE 69306254 D1 DE 69306254 T2 EP 0644962 A1 FI 945804 A JP 7507847 T MX 9303479 A1 NO 944774 A NZ 254329 A WO 9325746 A1 US 5484645 A	16-05-1995 15-12-1996 30-05-1996 04-01-1994 15-09-1998 23-12-1993 04-05-1994 09-01-1997 12-06-1997 29-03-1995 09-12-1994 31-08-1995 31-05-1994 09-12-1994 21-12-1995 23-12-1993 16-01-1996

Form PCT/ISA/210 (patent family annex) (July 1992)

THIS PAGE BLANK (USPTO)